



Yuasa Technical Data Sheet

Yuasa HJ-S46B24L(S)

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 45Ah |
| Cold Cranking Amps (EN1) | 325A |

Dimensions

| | |
|--------|-------|
| Length | 238mm |
| Width | 126mm |
| Height | 227mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 12.7kg |
|-----------------------|--------|



Container Features

| | |
|------------------------|-------------|
| Case Type | B24 JIS AGM |
| Cell Layout | 1 |
| Hold Down | N |
| Handles | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |


Technology

| | |
|---------------------------|------------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca VRLA AGM |
| Vibration | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 3A |
| Performance Marking | W5-C2-V2-E2 |

Terminal Type

T1

Standard DIN Post

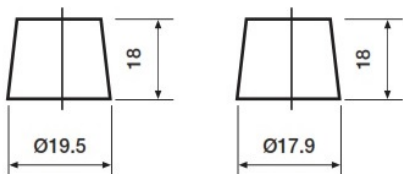

Positive Terminal

Negative Terminal

Cell Assembly Layout



Battery Hold-down



Data Sheet generated on 16/08/2021 – E&OE