



Yuasa Technical Data Sheet

Yuasa YBX1063 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 40Ah |
| Cold Cranking Amps (EN1) | 360A |

Dimensions

| | |
|--------|-------|
| Length | 207mm |
| Width | 175mm |
| Height | 175mm |

Weights & Measures

| | |
|-----------------------|----------|
| Mean Weight with Acid | 11.4kg |
| Acid Volume | 3 litres |



Container Features

| | |
|---------------------------|-----------------|
| Case Type | LB1 DIN |
| Hold Down | B13 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | Central Venting |


Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| Recommended Charge Rate | 2A |
| Performance Marking | W3-C2-V2-E1 |

Terminal Type

T1


Standard DIN Post

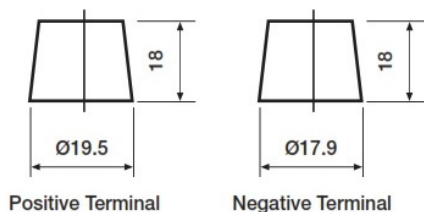

Positive Terminal


Negative Terminal

Cell Assembly Layout

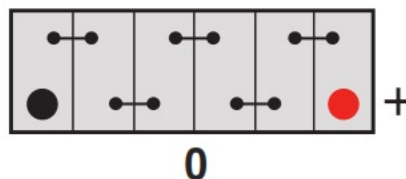

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

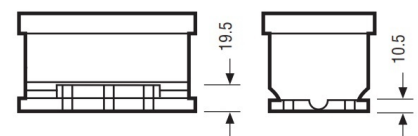

Data Sheet generated on 16/08/2021 - E&OE