



# CBHD3

Main features:

Reduced weight and dimensions


Power from 180W up to 600W

Current from 15A to 25A

Available in plastic and metal case  
(ON-BOARD use only)

## APPLICATIONS



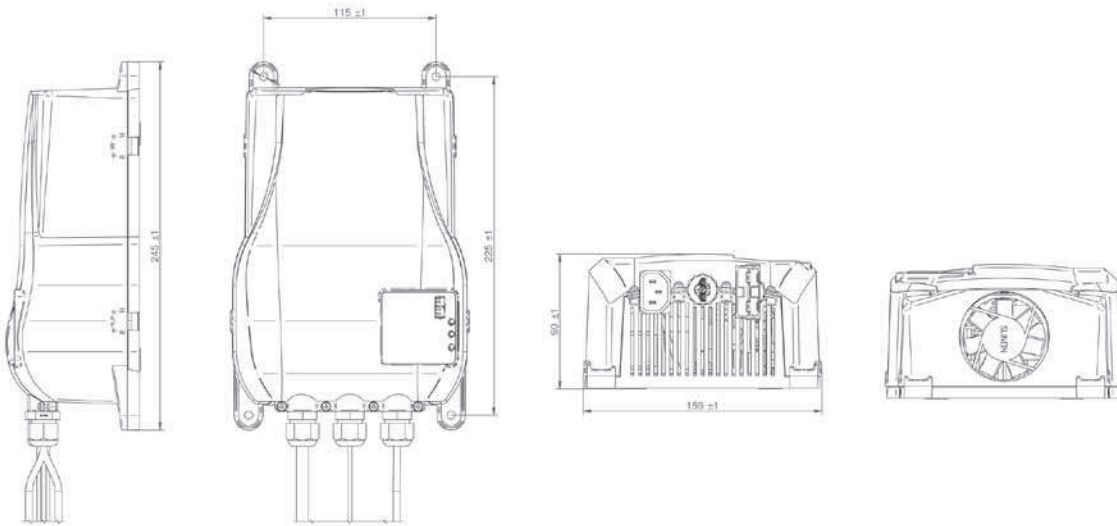

DIMENSIONS (LxWxH): 160x245x90 mm – 6.30x9.65x3.54 in

WEIGHT: 1,90 Kg - 4.19 lbs

PROTECTION GRADE IP30

INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

| Battery Voltage | Battery Range |              | Charging Current | Model |
|-----------------|---------------|--------------|------------------|-------|
|                 | 5h            | 20h          |                  |       |
| 12V             | 100 ÷ 150 Ah  | 130 ÷ 180 Ah | 15A              | 12-15 |
|                 | 120 ÷ 195 Ah  | 150 ÷ 240 Ah | 20A              | 12-20 |
|                 | 180 ÷ 260 Ah  | 220 ÷ 315 Ah | 25A              | 12-25 |
| 24V             | 100 ÷ 150 Ah  | 130 ÷ 180 Ah | 15A              | 24-15 |
|                 | 120 ÷ 195 Ah  | 150 ÷ 240 Ah | 20A              | 24-20 |
|                 | 180 ÷ 260 Ah  | 220 ÷ 315 Ah | 25A              | 24-25 |

