



Yuasa Technical Data Sheet

Yuasa YBX3205 - YBX3000 SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 60Ah |
| Cold Cranking Amps (EN1) | 540A |

Dimensions

| | |
|--------|-------|
| Length | 230mm |
| Width | 174mm |
| Height | 205mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 14.9kg |
|-----------------------|--------|



Container Features

| | |
|---------------------------|--------------------|
| Case Type | D23LS KOREA/BCI 86 |
| Hold Down | B1 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|-------------------------|-------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 4A |
| Performance Marking | W4-C2-V3-E1 |

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

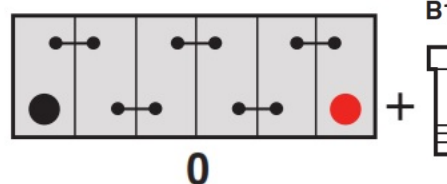

Battery Hold-down

B1

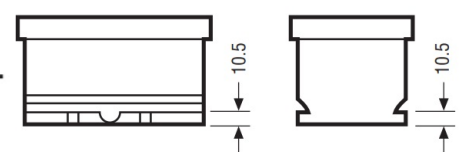

Data Sheet generated on 16/08/2021 - E&OE